



LenelS2 Supervised Input Application Blade

Overview

LenelS2[™] Supervised Input Application Blade is an interface board with eight input points to support a wide range of devices. The inputs support normally open, normally closed, supervised and non-supervised circuits. Compatible devices include buttons, door contacts, motion detectors, beam detectors, power supply monitoring points, burglar and alarm panel points and more.

Up to seven LenelS2 Application Blades in any combination can be supported by an Network Node. LenelS2 Application Blades are easy to install – Nodes automatically recognize and address them without jumpers or switches. Power and communications are delivered to every LenelS2 Application Blade via a ribbon cable bus.


Key Features

Inputs

- Device Support: Supports buttons, door contacts, motion detectors, beam detectors, power supply monitoring points, burglar and alarm panel points and more
- Input Configuration: Includes eight inputs configurable to normally open, normally closed, supervised and non-supervised circuits



Up to seven LenelS2 Application Blades in any combination can be supported by an Network Node.

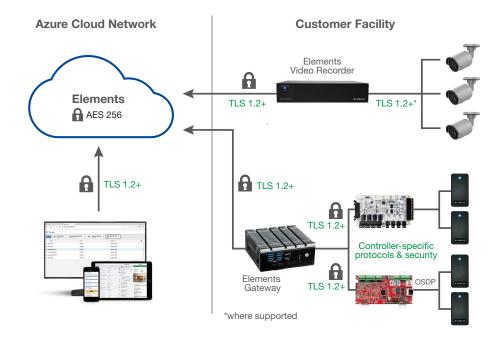

Specifications – LenelS2 Supervised Input Application Blade

Access Control	
Supervised Inputs	8
Input Supervision	Quad State (Open / Short / Normal / Alarm) Resistors value = 1K
Selection per Input	Dual Resistor / Single Series Resis- tor / Single Parallel Resistor / Unsupervised
Input Circuit Types	C / NO / NC
General	
Dimensions (H, W, D)	7.5 in x 4.0 in x 0.83 in
	(191 mm x 102 mm x 21.1 mm)
Weight	(191 mm x 102 mm x 21.1 mm) 4.5 oz (127 g)
Weight Operating Temperature	· · · · · · · · · · · · · · · · · · ·
	4.5 oz (127 g)
Operating Temperature	4.5 oz (127 g) 32°F – 95°F (0°C – 35°C)
Operating Temperature Storage Temperature	4.5 oz (127 g) 32°F – 95°F (0°C – 35°C) -4° – 158°F (-20° – 70°C) Humidity 85%,
Operating Temperature Storage Temperature Operating Environment	4.5 oz (127 g) 32°F – 95°F (0°C – 35°C) -4° – 158°F (-20° – 70°C) Humidity 85%, non-condensing 35° C

Cabling Requirements	
Supervised Input Cable	Twisted, shielded 22 AWG Belden #9462
Max Supervised Input Cable Distance	2000 ft (610 m)
Part Numbers	
S2-INP	Supervised input application extension blade with 8 inputs



For more information, please visit lenels2.com.

Specifications subject to change without notice.

 $\textcircled{\sc 0}$ 2023 Carrier. All Rights Reserved. All trademarks and service marks referred herein are property of their respective owners.