



# VRx 250

## Overview

The VRx™ next-generation video management system features advanced analytics based on deep learning technology. It provides a unified access control and video surveillance experience when used in conjunction with the NetBox™ access control system, Magic Monitor® unified client and Cumulus™ cloud-based service.

The VRx 250 server supports up to 16 IP cameras and up to 4TB of video storage, making the system well suited for small businesses. It is available as a stand-alone system and also tightly integrates with NetBox access control systems.

Real-time video monitoring and recorded video playback are accessible through the Magic Monitor client. By clicking on an icon in the activity log, users can instantly play back recorded video associated with an event and save it to the case library. Additional features include on-screen PTZ controls and integration of live video views into floor plan graphics.

The VRx 250 server includes the capability to manage and display crowdsourced video. Video footage submitted to the security team can be stored on the server and made available for forensic investigation.

The VRx system seamlessly fits into the NetBox ecosystem, allowing the entire solution to easily scale with organizational growth. The Linux-based server appliance is plug-and-play and operates similarly to other NetBox ecosystem products, making it easy to set up, configure and maintain.

## Key Features


### Video Management

- **Cameras:** Supports up to 16 IP cameras
- **ONVIF®:** Conforms to Profile T as an ONVIF registered product
- **High-Quality Video:** Supports 4K cameras and H.265 codec
- **Crowdsourced Video:** Manages video submitted from the organizational community, making it available for playback during forensic investigation
- **Real-Time Surveillance:** Allows for live video tours and on-screen PTZ controls using the Magic Monitor client
- **Forensic Search:** Locates recorded video of interest with a single click and saves it to the case library
- **Storage:** Supports up to 4TB of internal JBOD video storage

### System

- **IP Video Server:** Delivers real-time and recorded video to client
- **Access Control Integration:** Integrates with NetBox access control systems for unified system management and administration
- **Customizable Monitoring Displays:** Provides customization of real-time monitoring displays, with single or multi-camera views
- **Mobile App:** Allows for mobile security management using the Mobile Security Professional® app



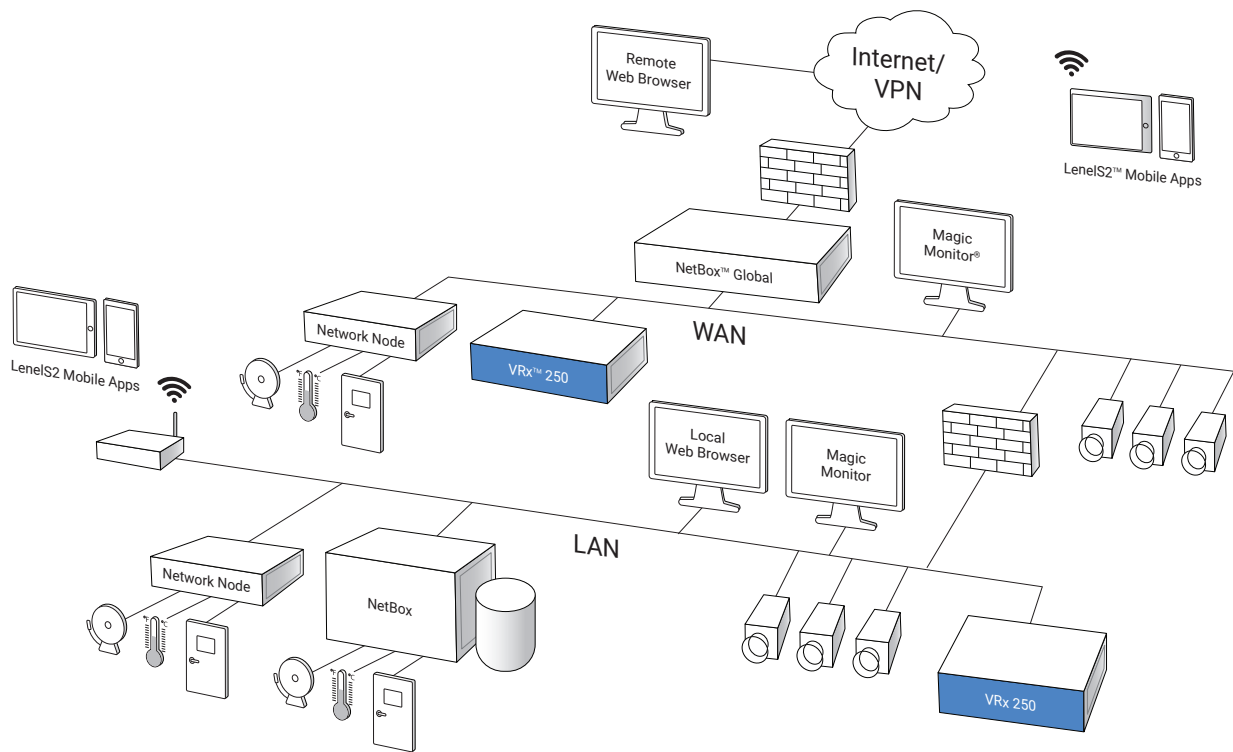

Schematic only. Not a network diagram.

## Specifications – VRx 250

### Video Management

IP Camera Streams	Up to 16
IP Camera Resolution	Camera dependent, up to 4K
IP Camera Frame Rate	Camera dependent
Compression Type	H.264 or H.265 (camera dependent)

### Appliance

Video Storage	2TB or 4TB HDD
Storage Configuration	JBOD
Processor	Intel® Core™ i3
Memory (RAM)	8GB
Operating System	Ubuntu Linux
OS/Application Storage	80GB SSD minimum
Ethernet Ports	2
Max Video Throughput (Aggregate Inbound + Outbound)	100 Mbps
MTBF	107,071 hours
Chassis	Standard 2U rack mount Surface mount
Dimensions (H, W, D)	3.5in x 19.0in x 14.58in (89mm x 483mm x 370mm)

### Appliance (continued)

Weight	12 lbs (5.4 kg) maximum
Operating Temperature	50° – 95°F (10° – 35°C)
Storage Temperature	-40° – 158°F (-40° – 70°C)
Operating Environment	Humidity 85%, non-condensing 35°C
AC Input	100 – 240 VAC, 50/60 Hz, 6A/3A
BTU Maximum	938 per hour
Regulatory Approvals	UL, CE, FCC, RoHS
Warranty	3 years, hardware; 3 years, software

### Client Requirements

Operating System	Windows 10 (64 bit), macOS High Sierra and later
Processor	Intel Core i3 or higher
Memory (RAM)	4GB minimum
Hard Drive	100GB minimum

### Part Numbers

S2-VRX250-2TB	IP camera licenses expandable up to 8 IP cameras; 2TB HDD
S2-VRX250-4TB	IP camera licenses expandable up to 16 IP cameras; 4TB HDD
S2-VRX-1C	Single camera license



For more information, please visit [lenel2.com](http://lenel2.com).

Specifications subject to change without notice.

©2019, 2021 Carrier. All Rights Reserved. All trademarks are the property of their respective owners. LenelS2 is a part of Carrier.

S2060821

